

FBS II

intercable TOOLS


CABLE STRIPPER FOR VULCANIZED SEMICONDUCTIVE LAYER **WITHOUT** SILICON

Handling


Shift lever for activation/deactivation of the axial feed enables an optimal guidance and precise circular cut

Agility

Movable roller system adapts optimally to small and large diameters, no silicon required



Video FBS II

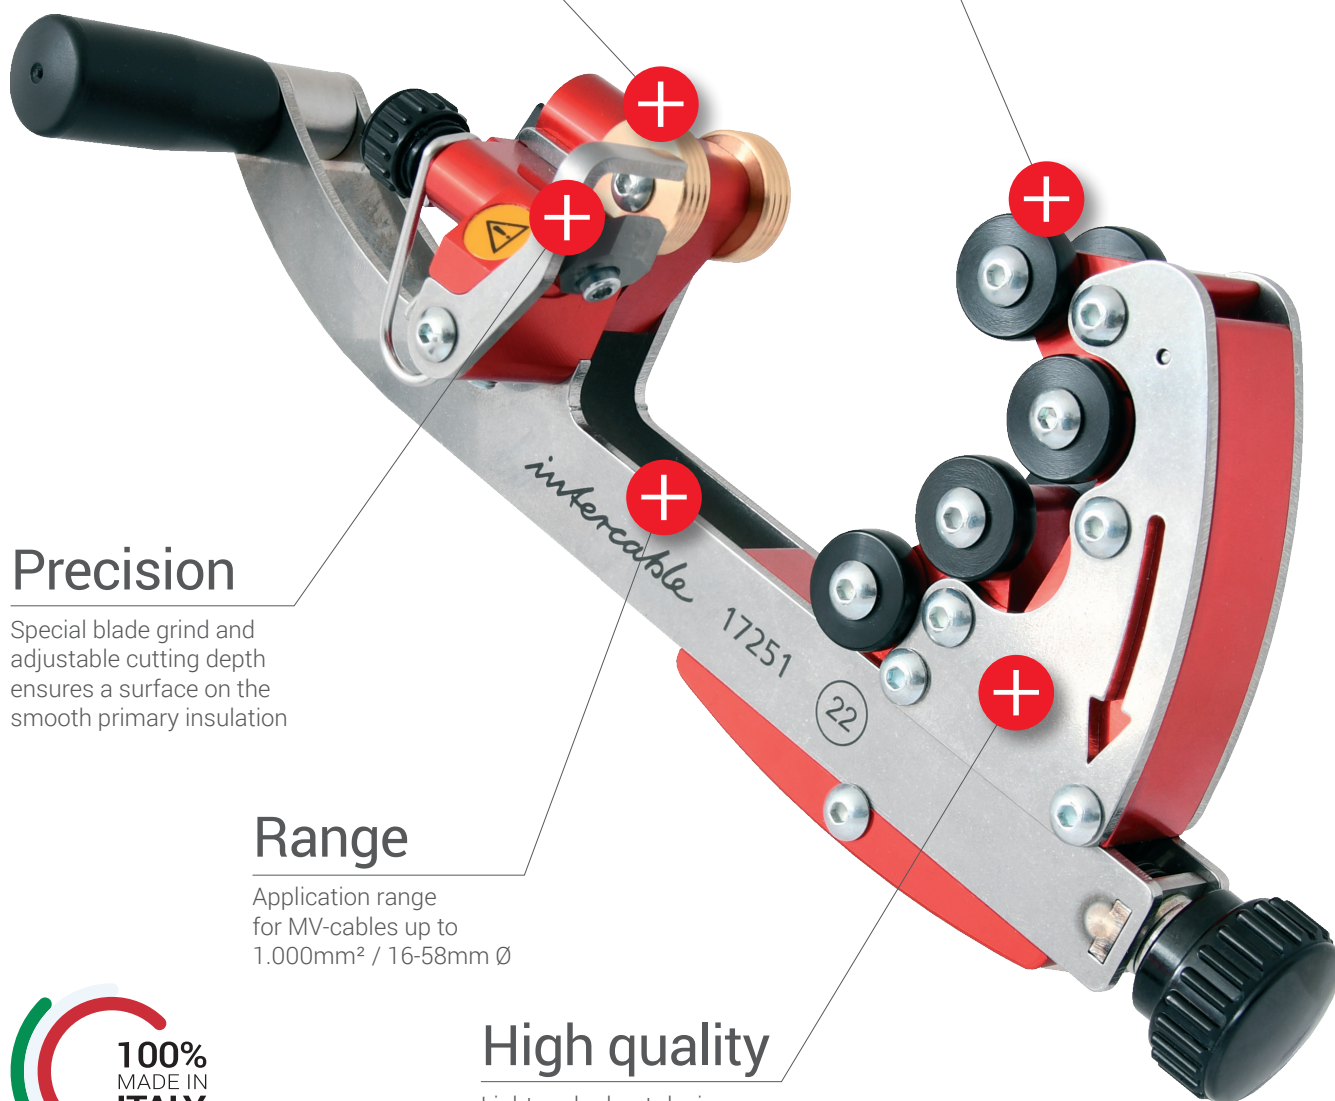

Precision

Special blade grind and adjustable cutting depth ensures a surface on the smooth primary insulation

Range

Application range for MV-cables up to 1.000mm² / 16-58mm Ø



High quality

Light and robust design through the use of light metals and stainless INOX



www.intercable-tools.com





intercable
TOOLS

TECHNICAL CHARACTERISTICS

Designed to remove the vulcanized semiconductive layer of
MV-cables up to 1,5mm insulation thickness
Application range for MV-cables up to 1000mm² / 16-58mm Ø

- Light and robust design through the usage of light metals and stainless INOX
- Positioning on the cable like a vice system
- Optimal sliding properties thanks to the movable wheel system,
no additional silicon required
- Axial feed activation/deactivation with 2-speed advance possibility
- Blade shape with 8° or 17° angle for gentle transmission from semiconductive layer to primary insulation
- Replaceable blade, made of hardened steel
- Adjustable blade depth from 0 to 1,5mm (each click = 0,1 mm)
- Possibility to **limit and lock** the blade depth


- Dimensions/Tool: L x W x H 220x60x90 mm
- Weight/Tool: 580 gr.




SET EQUIPMENT & ACCESSORIES

- FBS II - cable stripper 17251
- 2,5 mm Allen wrench 17100
- Soft nylon case AB6230

- Spare blade 17° 17142



- Spare blade 8° 17143



- Set-FBS II 17° 17250

- Set-FBS II 8° 17252



www.intercable-tools.com

